


BUCK Bioculture (충 부유세균 채취장치)

B30120

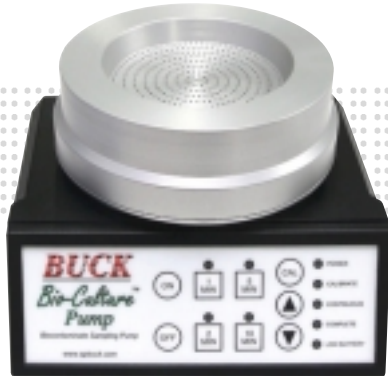

B30120 제품특징

- 펌프 일체형이며 소형, 경량으로 휴대하기가 편리하다.
- 사용이 간편하며 가격이 저렴하다.
- 실내 공기질 공정시험법에 준하여 사용이 가능하다.
- 충돌법에 의한 부유세균, 미생물 채취에 적합하다.
- 학교, 병원, 식당 등 다중이용시설의 부유세균 및 미생물 채취용으로 사용이 가능하다.
- 충전전전지가 내장되어 현장측정용으로 적합하다.
- 30~120 l/min의 높은 유량으로 샘플링 시간이 빠르다.
- 1, 2, 5, 10분의 측정시간 설정이 가능하다.



Tripod 설치



Calibration head (선택품목)

SPECIFICATIONS

사양 / 제품번호	B30120
Accuracy (정밀도)	±5%
Flow range (유량 범위)	30 ~ 120 l/min
Timer (시간설정)	1, 2, 5, 10 min
Sampling head	1mm diameter / 380 holes
Dimension (크기)	약 114(H) × 152(W) × 133(D) mm
Weight (무게)	약 1.2kg

Single Stage Ambient Viable Sampler (미생물 채취기)

10-890



10-890

10-890 특징

- Petri Dish에 미생물을 포집하여 배양 측정이 용이
- 22.0μm 이상과 0.65μm 미만 사이에서 채취
- 분당 28.3ℓ의 유량으로 다량의 시료채취 가능

10-890 용도

- 실내 및 작업 환경 중의 미생물 채취
- 미생물 제어 생산공정, Clean Room 및 병원환경 등의 미생물 측정

SPECIFICATIONS

사양 / 제품번호	10-890
Measurement	Airborne microbe
Method/Collection Mode	Single-stage viable cascade impactor (NIOSH 6)
Material	Anodized aluminum alloy
Particle Size	0.65 μm ~ 22.0 μm
Vacuum Pump Flow Rate	28.3 l/min
Power	110V/60Hz, 220V/50Hz (1cfm) vane pump, valve vacuum hose 12VDC vane pump, valve vacuum hose
Dimensions	Impactor : 133mm D × 88.90mm H Pump : 241mm W × 140mm H × 144mm D
Weight	Impactor : 2.75kg Pump : 18.84kg

CONFIGURATIONS

1 aluminum orifice stage
Silicon O-rings gaskets
Vacuum pump assembly
Carrying case

CONFIGURATIONS

Glass badge, 12/set
